



## SPECIFICATION

P/N:OP-H45SM4530-2




### Application:

- double sided emitting Light box with depth of 50-200MM


### Features:

- Lens designed for double sided emitting light box
- Light decay <3% for 6000hrs
- CRI>70
- 3-step MacAdam ellipse
- HB fire safety level
- IP65 waterproof
- Cutable every module
- 5 years warranty

### Beam Angle:15°\*45°

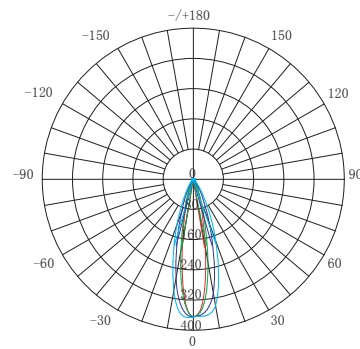



### Dimensions:

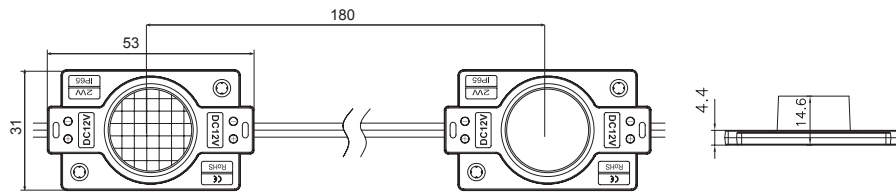


### Order INFO and Parameter:

Part No.	Voltage	Power/pc	Lumen/pcs	LED Type	Ra	Housing material	Dimensio	Working TEMP	Available Color
OP-H45SM4530-2	DC12V	2.0W	202LM	EMC 3030	>70	ABS	53*31*14.6mm	-25°C to +60 °C	3000K/7000K/12000K

### Installation Reference:



Part No.	Depth(H)	Qty/M <sup>2</sup>	Power/M <sup>2</sup>	Illumination
OP-H45SM4530-2 2.0W	120mm	30pcs	60W	1200lux
	150mm	26pcs	52W	950lux
	180mm	26pcs	52W	850lux
	200mm	26pcs	52W	780lux

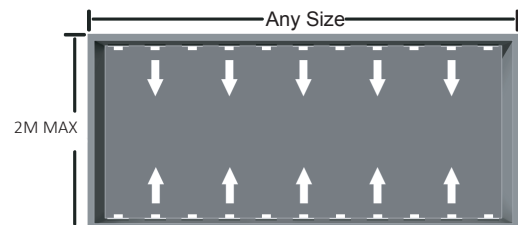

### Packing Details:

Packing	Qty/chain	Qty/bag	Qty/carton	Carton Size
Qty	20pcs	120pcs	1200pcs	54*32*43cm
Weight	0.21KG	2.1KG	22.5KG	