



深圳欧立德光电有限公司
OPLED Technology CO., LTD

Address: 2F, 1st block, Minying Road, Shilongzai, Shuitian, Shiyan, Bao'an, Shenzhen, China

Best for 40-150mm thick light box
3030 LED light strip



OP-NFL3030-1212

100cm 12pcs SMD3030



OPLED TECHNOLOGY CO.,LTD

2F, 1st block, Minying Road, Shilongzai, Shuitian, Shiyan, Bao'an, Shenzhen, China

Tel: 0086-755-29449311

Fax: 0086-29836800

Website: www.opleder.com

Skype: opleder

Wechat: opled-chris

Mobile: 0086-15889329910



深圳欧立德光电有限公司

OPLED Technology CO., LTD

Address: 2F, 1st block, Minying Road, Shilongzai, Shuitian, Shiyuan, Bao'an, Shenzhen, China

Feature

- Non-waterproof for indoor application
- Powered by SMD3030 LED with high quality
- Easy and fast installation
- Energy saving, Environment friendly
- Long life span

Application

- 40-150MM thick light box

Product Picture






深圳欧立德光电有限公司 OPLED Technology CO., LTD

Address: 2F, 1st block, Minying Road, Shilongzai, Shuitian, Shiyuan, Bao'an, Shenzhen, China

Technical Parameter

Part No.:	OP-NFL3030-1212
LED Type:	SMD3030
LED Quantity:	12pcs
Viewing angle:	165°
Lifespan:	50000h
Single LED Brightness /Luminous (lm):	110-130lm/led
Available emitting Color:	Warm white:3000-3500K, / Pure white:6000-7000K /Cool White 10000-15000K
Working Voltage	DC12V
Power	12W
Connect	White and Gray wire, Gray wire is Anode, White wire is Negative electrode,
Material	Aluminum PCB
Dimension	950*17*1.2mm
Fixed Method	Screw
	M5*15 Screw
Working Temperature	-20℃ ~ +60℃
Storage Temperature	-30℃ ~ +60℃
Storage Environment	Indoor ventilation, Air should be no corrosive gas, and avoid direct sunlight
IP rank	IP20 Non-waterproof

Installation Reference Scheme

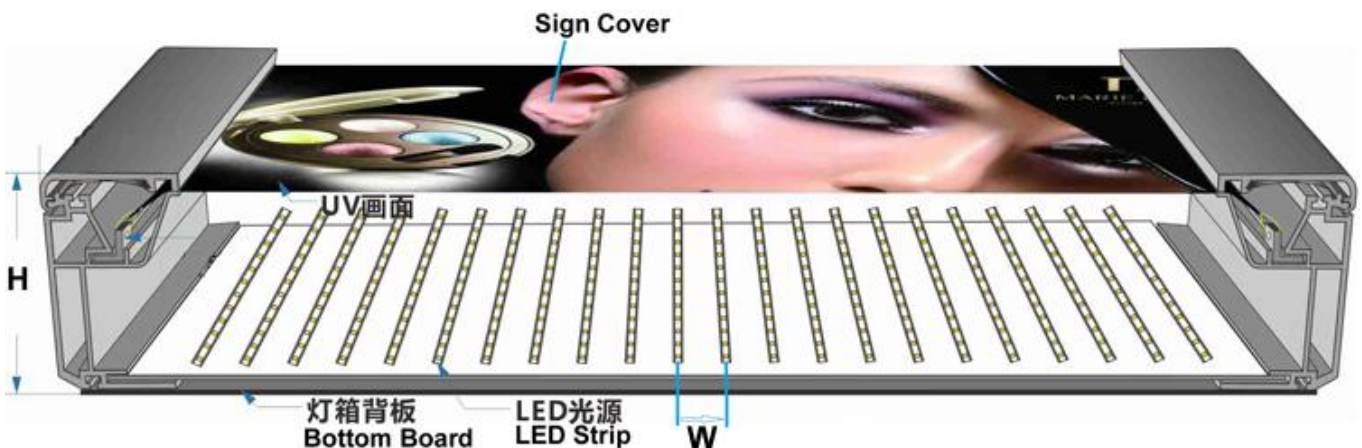

W: Distance between LED strip

H: Height of Light Box

Please note, to assure uniform luminance, W must be less than H (W<H).




深圳欧立德光电有限公司 OPLED Technology CO., LTD


Address: 2F, 1st block, Minying Road, Shilongzai, Shuitian, Shiyuan, Bao'an, Shenzhen, China

Connection Way1:

接线方式:

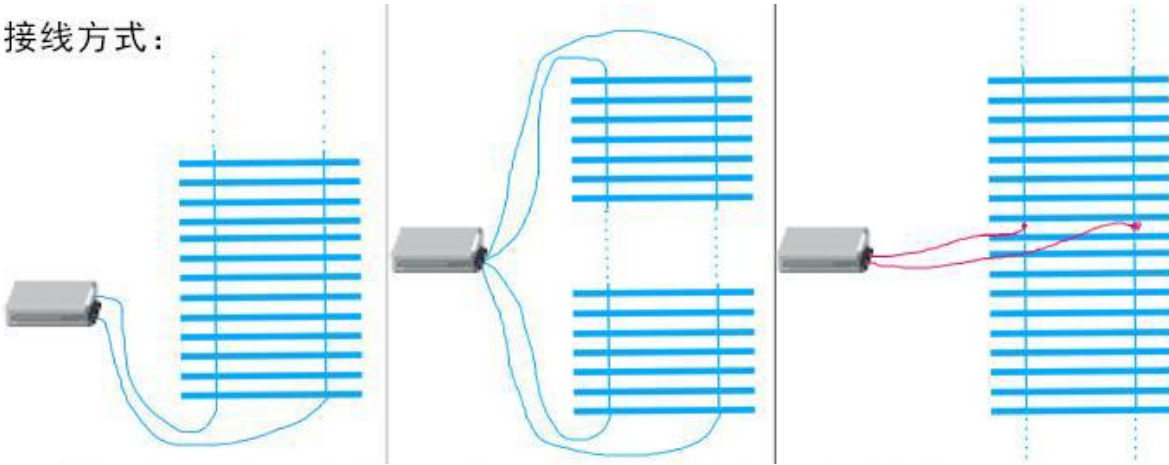

Connection Way 2:

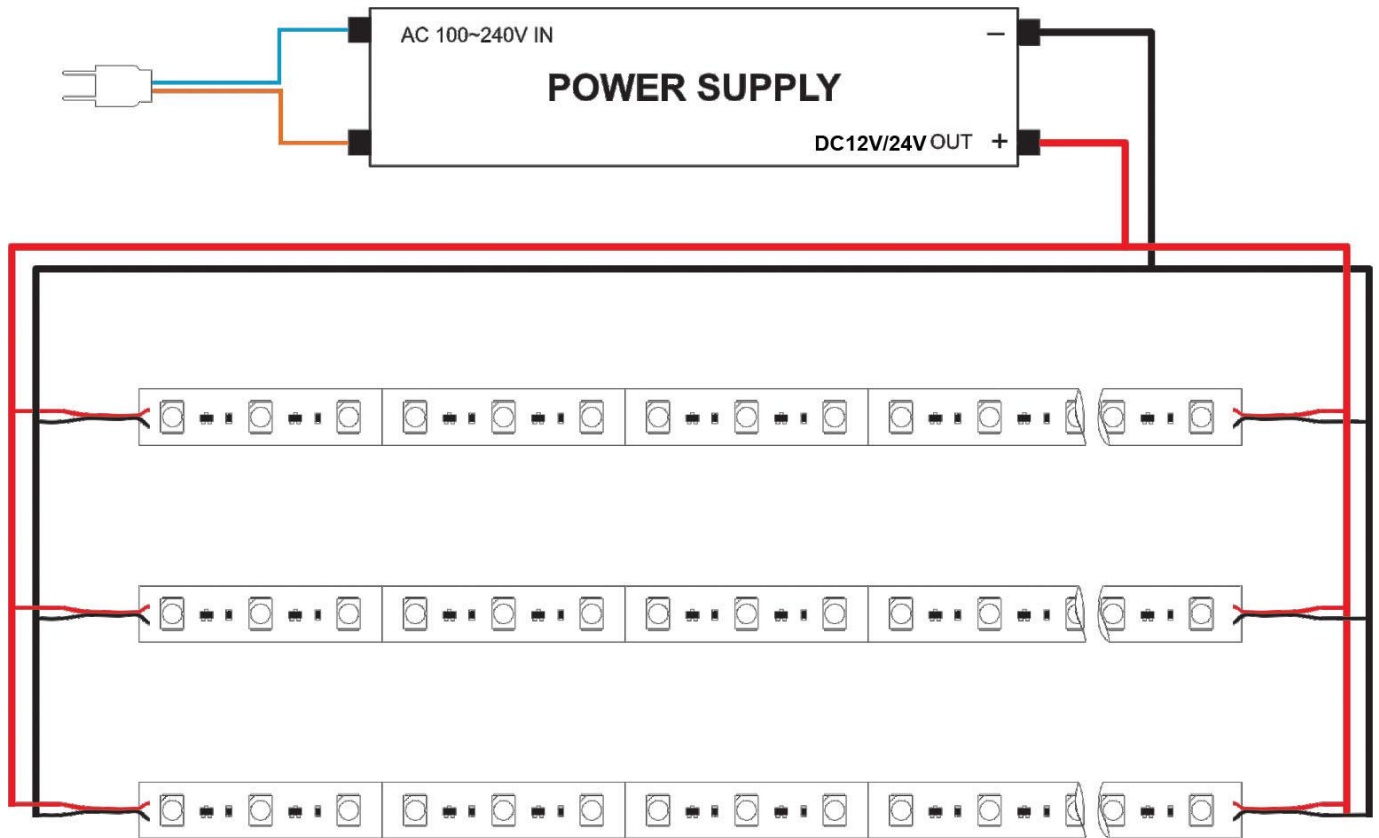

parallel connection and

also connect the both ends of led strip lights to the power supply